

# FLAGPOLE TRUCKS & ACCESSORIES



## ST-1 SERIES

Cast aluminum construction with a 1" outside diameter nylon pulley on a 3/16" stainless steel axle. Designed to slip over the top of the flagpole and be secured by one 1/4"-20NC stainless steel set screw. The top is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading if desired. The ornament is secured to the truck with a size 10-32 stainless steel pan head screw. Maximum halyard diameter is 1/4".

For External Halyard Poles • Cap Style • Stationary • Single Pulley

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
ST-1-38	1 <sup>3</sup> / <sub>8</sub> "	1.0	340000	\$23.50	\$21.50	340005	\$27.00	\$24.50	340010	\$27.00	\$24.50	340015	\$27.00	\$24.50
ST-1-12	1 <sup>1</sup> / <sub>2</sub> "	1.0	340001	23.50	21.50	340006	27.00	24.50	340011	27.00	24.50	340016	27.00	24.50
ST-1-34	1 <sup>3</sup> / <sub>4</sub> "	1.0	340002	23.50	21.50	340007	27.00	24.50	340012	27.00	24.50	340017	27.00	24.50
ST-1-16	1 <sup>5</sup> / <sub>16</sub> "	.80	340003	23.50	21.50	340008	27.00	24.50	340013	27.00	24.50	340018	27.00	24.50
ST-1-20	2"	.80	340004	23.50	21.50	340009	27.00	24.50	340014	27.00	24.50	340019	27.00	24.50



## ST-32 SERIES

Cast aluminum construction with a 1<sup>1</sup>/<sub>2</sub>" outside diameter cast pulley on a 1/4" stainless steel axles. Designed to slip over the top of the flagpole and be secured with three 5/16"-18NC stainless steel set screws. The top is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading if desired. The ornament is secured to the truck with a 1/4"-20NC stainless set screw. Maximum halyard diameter is 5/16".

For External Halyard Poles • Cap Style • Stationary • Double Pulley

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
ST-3	1 <sup>7</sup> / <sub>8</sub> "	1.9	340040	\$48	\$43	340042	\$52	\$48	340044	\$52	\$48	340046	\$52	\$48
ST-2	2 <sup>3</sup> / <sub>8</sub> "	1.7	340041	48	43	340043	52	48	340045	52	48	340047	52	48



## OT SERIES

Cast aluminum construction with pulley (1<sup>1</sup>/<sub>2</sub>" outside diameter on OTH, OT1, OT25 and OT35; 2" outside diameter on OT2, OT3 and OT325) on a 1/4" stainless steel axle. Designed to slip over the top of the flagpole and be secured by stainless steel set screws (one 1/4"-20NC on the OTH; three 5/16"-18NC on the OT1, OT2, OT25, OT3, OT325 and OT35). The top of is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading if desired. The ornament is secured to the truck with a size 10-32 stainless steel pan head screw. Maximum halyard diameter is 5/16".

For External Halyard Poles • Cap Style • Stationary • Single Pulley

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
OTH	2"	.55	340056	\$21.50	\$19.50	340062	\$24.50	\$22.50	340068	\$24.50	\$22.50	340074	\$24.50	\$22.50
OT1	2 <sup>3</sup> / <sub>8</sub> "	.95	340057	29.00	24.50	340063	33.00	29.00	340069	33.00	29.00	340075	33.00	29.00
OT25	2 <sup>1</sup> / <sub>2</sub> "	.95	340058	31.00	27.00	340064	36.00	31.00	340070	36.00	31.00	340076	36.00	31.00
OT2	2 <sup>3</sup> / <sub>4</sub> "	1.5	340059	33.00	29.00	340065	37.00	33.00	340071	37.00	33.00	340077	37.00	33.00
OT3	3"	1.3	340060	36.00	31.00	340066	39.00	36.00	340072	39.00	36.00	340078	39.00	36.00
OT325	3 <sup>1</sup> / <sub>4</sub> "	1.2	340343	37.00	33.00	340344	43.00	40.00	340345	43.00	40.00	340346	43.00	40.00
OT35	3 <sup>1</sup> / <sub>2</sub> "	1.8	340061	40.00	37.00	340067	43.00	40.00	340073	43.00	40.00	340079	43.00	40.00



## RTC-1 SERIES

Cast aluminum construction with a 1<sup>1</sup>/<sub>2</sub>" outside diameter cast pulley on a 1/4" stainless steel axle. The bottom portion of the spindle is designed to fit over the top of the flagpole and is secured with three stainless steel set screws (1/4"-20NC on the RTC-1-2 and RTC-1-138 & 5/16"-18NC on the RTC-1-238). The top is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading. The ornament is secured to the truck with a 1/4"-20NC stainless steel set screw. For ease of rotation, product life and strength, these trucks utilize self-lubricating ball bearing assemblies. Maximum halyard diameter is 5/16".

For External Halyard Poles • Cap Style • Revolving • Single Pulley

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
RTC-1-138	1 <sup>3</sup> / <sub>8</sub> "	1.8	340351	\$79	\$69	340308	\$87	\$78	340309	\$87	\$78	340352	\$87	\$78
RTC-1-2	2"	1.6	340104	79	69	340106	87	78	340108	87	78	340110	87	78
RTC-1-238	2 <sup>3</sup> / <sub>8</sub> "	1.9	340105	79	69	340107	87	78	340109	87	78	340111	87	78

All trucks on pages 164 thru 167 except the fiberglass trucks can be mixed to achieve the higher quantity pricing.

All bronze colored accessories on pages 162 through 186 are supplied in a dark bronze #313 shade. If medium bronze #312, light bronze #311 or a custom color is desired, please call for pricing.

# FLAGPOLE TRUCKS & ACCESSORIES



## RTC-2 SERIES

Same description as our RTC-1 Series on the previous page, except this series is supplied with two 1<sup>15</sup>/<sub>16</sub>" outside diameter nylon pulleys.

For External Halyard Poles • Cap Style • Revolving • Double Pulley

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
RTC-2-138	1 <sup>3</sup> / <sub>8</sub> "	2.5	340353	\$79	\$69	340310	\$87	\$78	340311	\$87	\$78	340354	\$87	\$78
RTC-2-2	2"	2.3	340120	79	69	340122	87	78	340124	87	78	340126	87	78
RTC-2-238	2 <sup>3</sup> / <sub>8</sub> "	2.6	340121	79	69	340123	87	78	340125	87	78	340127	87	78



## RTS-1 SERIES

Cast aluminum construction with a 1<sup>1</sup>/<sub>2</sub>" outside diameter nylon pulley on a 1/4" stainless steel axle. This truck is designed to be used on flagpoles that have up to a 3<sup>1</sup>/<sub>2</sub>" outside top diameter with female fitting installed. The bottom of the spindle has a 1<sup>1</sup>/<sub>4</sub>" NPT threading and is screwed into the top of the flagpole while the top spindle is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading. The ornament is secured to the truck with a 1/4"-20NC stainless steel set screw. For ease of rotation, product life and strength, these trucks utilize self-lubricating ball bearing assemblies. Maximum halyard diameter is 5/16".

For External Halyard Poles • Threaded Type • Revolving • Single Pulley

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
RTS-1-125	3 <sup>1</sup> / <sub>2</sub> "	1.9	340136	\$64	\$58	340137	\$70	\$64	340138	\$70	\$64	340139	\$70	\$64



## RTS-2 SERIES

Same description as our RTS-1 Series above, except this series is supplied with two 1<sup>15</sup>/<sub>16</sub>" outside diameter nylon pulleys.

For External Halyard Poles • Threaded Type • Revolving • Double Pulley

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
RTS-2-125	3 <sup>1</sup> / <sub>2</sub> "	2.6	340144	\$70	\$64	340145	\$75	\$67	340146	\$75	\$67	340147	\$75	\$67



## HDT-1 SERIES

Cast aluminum construction with a 2<sup>1</sup>/<sub>2</sub>" outside diameter aluminum pulley on 1/2" stainless steel axles. This truck is designed to be used on flagpoles that have up to a 5<sup>1</sup>/<sub>2</sub>" outside top diameter with female fitting installed. The bottom of the spindle has a 1<sup>1</sup>/<sub>4</sub>" NPT threading and is screwed into the top of the flagpole while the top spindle is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading. The ornament is secured to the truck with a 1/4"-20NC stainless steel set screw. The truck body rotates on 26 stainless steel ball bearings on cast races. Maximum halyard diameter is 3/8".

For External Halyard Poles • Threaded Type • Revolving • Single Pulley

Note: The revolving arm of this truck can be modified for larger pole top diameters; contact us for a prompt quotation.

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
HDT-1	5 <sup>1</sup> / <sub>2</sub> "	8.5	340335	\$150	\$136	340336	\$163	\$146	340337	\$163	\$146	340338	\$163	\$146



## HDT-2 SERIES

Same description as our HDT-1 Series above, except this series is supplied with two 3<sup>3</sup>/<sub>4</sub>" pulleys.

For External Halyard Poles • Threaded Type • Revolving • Double Pulley

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
HDT-2	5 <sup>1</sup> / <sub>2</sub> "	8.5	340152	\$150	\$136	340153	\$163	\$146	340154	\$163	\$146	340155	\$163	\$146

All trucks on pages 164 thru 167 except the fiberglass trucks can be mixed to achieve the higher quantity pricing.

All bronze colored accessories on pages 162 through 186 are supplied in a dark bronze #313 shade. If medium bronze #312, light bronze #311 or a custom color is desired, please call for pricing.

# FLAGPOLE TRUCKS & ACCESSORIES



For External Halyard Poles • Threaded Type • Revolving • Double Pulley

## EXTRA HEAVY-DUTY SERIES

Cast aluminum construction with 3/8" outside diameter aluminum pulleys on 1/2" stainless steel axles. This truck is designed to be used on flagpoles that have up to a 12 3/4" outside top diameter with female fitting installed. The bottom of the spindle has a 1 1/4" NPT threading and is screwed into the top of the flagpole while the top spindle is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading. The ornament is secured to the truck with a 1/4"-20NC stainless steel set screw. For ease of rotation, product life and strength, these trucks utilize stainless steel sealed lubricant ball bearing assemblies. Maximum halyard diameter is 3/8".

MODEL	SPINDLE MATERIAL	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
XHDT	ALUMINUM	9.7	340160	\$632	\$568	340162	\$664	\$600	340164	\$664	\$600	340166	\$664	\$600
XHDT-SS	STAINLESS STEEL	12	340161	1,110	1,002	340163	1,133	1,023	340165	1,133	1,023	340167	1,133	1,023



For Internal Halyard Poles • Cap Style • Stationary • Single Pulley

## IH-1 SERIES

Cast aluminum construction for use on rope style internal halyard flagpoles. A small pulley assembly is added to the inside of a standard outrigger style truck to allow the halyard to feed from inside the flagpole. The pulley assembly has a 1 1/2" outside diameter cast nylon pulley on a 1/4" stainless steel axle and is held in place inside the truck by a 5/16"-18NC stainless steel set screw. The truck has a 2" (IH-1-3) or 1 1/2" (IH-1-35) outside diameter cast nylon pulley on a 1/4" stainless steel axle and is designed to slip over the top of the flagpole and be secured with three 5/16"-18NC stainless steel set screws. The top of the truck will accept an ornament with 1/2"-13NC threading as standard but can be supplied with other sizes of threading. The ornament is held in place by a size 10-32 stainless steel pan head screw. Maximum rope diameter is 5/16".

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
IH-1-3	3"	1.6	340178	\$55	\$50	340180	\$62	\$55	340182	\$62	\$55	340184	\$62	\$55
IH-1-35	3 1/2"	2.3	340179	73	67	340181	84	75	340183	84	75	340185	84	75




For Internal Halyard Poles • Threaded Type • Revolving • Single Pulley

## IH-2 SERIES

All of these cast aluminum trucks have a 1 1/4" NPT threaded spindle which screws into the top of the flagpole where a female fitting has been installed. The top of all trucks are designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied in other sizes of threading. The ornament is secured to the truck with a 1/4"-20NC stainless steel set screw. The extra large model has stainless steel sealed lubricant bearing assemblies while all other sizes utilize stainless steel ball bearings in both upper & lower bearing races. All sizes are supplied with a stainless steel bushing at the cable exit point except the IHT-3 which has a bronze fitting.

MODEL	TRUCK BASE DIA.	TRUCK HT.	MAX. POLE TOP DIA.	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
					ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
IHT-VR	5"	4 1/2"	3"	3.3	340194	\$179	\$163	340198	\$197	\$179	340206	\$197	\$179	340202	\$197	\$179
IHT-1	6 1/2"	6 1/2"	4"	6.4	340195	275	248	340199	299	269	340207	299	269	340203	299	269
IHT-2	7 1/2"	7 1/2"	5"	8.1	340196	333	299	340200	362	326	340208	362	326	340204	362	326
IHT-3	10 1/2"	8 1/2"	7 1/2"	16	340197	667	601	340201	740	665	340209	740	665	340205	740	665

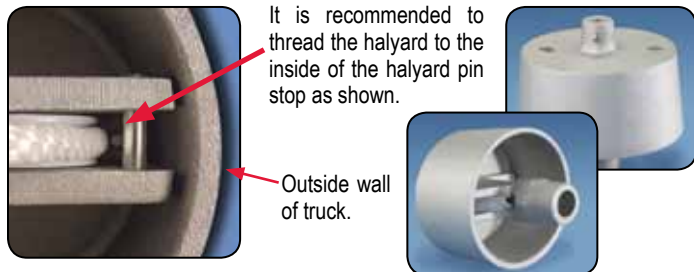

It is recommended to thread the halyard to the inside of the halyard pin stop as shown.

Outside wall of truck.

## IHT-VS SERIES

Cast aluminum construction for use on rope style internal halyard flagpoles. A small pulley assembly is affixed to the inside of the truck housing to allow the halyard to feed from inside the flagpole. The pulley assembly has a 2" outside diameter cast nylon pulley on a 1/4" stainless steel axle. This truck is designed to be used on flagpoles that have up to a 3 1/2" outside top diameter with female fitting installed. The bottom of the spindle has a 1 1/4" NPT threading and is screwed into the top of the flagpole. The top of the truck will accept an ornament with 1/2"-13NC threading as standard but can be supplied with other sizes of threading. The ornament is secured to the truck with a 1/4"-20NC stainless steel set screw. Maximum rope diameter is 5/16".

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
IHT-VS	3 1/2"	2.4	340312	\$75	\$67	340313	\$84	\$75	340314	\$84	\$75	340315	\$84	\$75

All trucks on pages 164 thru 167 except the fiberglass trucks can be mixed to achieve the higher quantity pricing.

All bronze colored accessories on pages 162 through 186 are supplied in a dark bronze #313 shade. If medium bronze #312, light bronze #311 or a custom color is desired, please call for pricing.

# FLAGPOLE TRUCKS & ACCESSORIES



For External Halyard Poles • Threaded Type • Revolving • Double Pulley

## 150 SERIES

Cast aluminum construction with 1<sup>15</sup>/<sub>16</sub>" outside diameter nylon pulleys on 3/8" stainless steel axles. This truck is designed to be used on flagpoles that have up to a 4" outside top diameter with female fitting installed. The bottom of the spindle has a 1<sup>1</sup>/<sub>2</sub>" NPT threading and is screwed into the top of the flagpole while the top spindle is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading. The ornament is secured to the truck with a 1/4"-20NC stainless steel set screw. The truck body rotates on 26 stainless steel ball bearings on cast races. Maximum halyard diameter is 5/16".

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
RTS-2-150	3 <sup>1</sup> / <sub>2</sub> "	2.8	340170	\$120	\$109	340171	\$135	\$120	340172	\$135	\$120	340173	\$135	\$120



For External Halyard Poles • Threaded Type • Revolving • Double Pulley

## BA SERIES

Cast bronze alloy construction with 1<sup>15</sup>/<sub>16</sub>" outside diameter nylon pulleys on 1/4" stainless steel axles. This truck is designed to be used on flagpoles that have up to a 4" outside top diameter with female fitting installed. The bottom of the spindle has a 1<sup>1</sup>/<sub>4</sub>" NPT threading and is screwed into the top of the flagpole while the top spindle is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading. The ornament is secured to the truck with a 1/4"-20NC stainless steel set screw. For additional ease of rotation, product life and strength, these trucks utilize stainless steel sealed lubricant ball bearing assemblies. Maximum halyard diameter is 5/16".

MODEL	ITEM #	FITS POLE DIA.	1-5	6+	LBS.
RTSB	340168	4"	\$300	\$278	4.7



For External Halyard Poles • Slip Fit Type • Stationary • Single Pulley

## FIBERGLASS-1 SERIES

Molded fiberglass construction with 3/4" outside diameter nylon pulley on a 3/16" stainless steel axle. The stem of the truck is designed to slip into a 2" inside diameter pole top and is held in place by drilling thru the pole and securing the truck to the pole with an appropriate size bolt or screw (not included). The top of the truck is designed to accept an ornament with a spindle threading of 1/2"-13NC. Maximum halyard size is 1/4".

WHITE			
ITEM #	1-5	6+	LBS.
340226	\$94	\$85	1.4



For External Halyard Poles • Threaded Type • Stationary • Double Pulley

## FIBERGLASS-2 SERIES

Molded fiberglass construction with 1<sup>1</sup>/<sub>2</sub>" outside diameter nylon pulleys on 1/4" stainless steel axles. The top of the truck is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading if desired. The aluminum spindle is threaded 1<sup>1</sup>/<sub>4</sub>" NPT. Maximum halyard diameter is 5/16".

WHITE			
ITEM #	1-5	6+	LBS.
340228	\$94	\$85	2.5



For Internal Halyard Poles • Threaded Type • Stationary • Single Pulley

## FIBERGLASS-IH SERIES

Molded fiberglass construction with a 1<sup>1</sup>/<sub>2</sub>" outside diameter nylon pulley. This stationary truck is designed to be used on flagpoles that have up to a 3<sup>1</sup>/<sub>4</sub>" outside top diameter with female fitting installed. The spindle has 1<sup>1</sup>/<sub>4</sub>" NPT threading and is screwed into the top of the flagpole. The spindle is hollow allowing the halyard to feed from inside the flagpole. The top of the truck will accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading. Maximum halyard diameter is 5/16".

WHITE			
ITEM #	1-5	6+	LBS.
340232	\$94	\$85	2.8

All trucks on pages 164 thru 167 except the fiberglass trucks can be mixed to achieve the higher quantity pricing.

All bronze colored accessories on pages 162 through 186 are supplied in a dark bronze #313 shade. If medium bronze #312, light bronze #311 or a custom color is desired, please call for pricing.


# FLAGPOLE TRUCKS & ACCESSORIES



## POLE TOP ADAPTERS

These adapters are used in mounting a truck that has a spindle threading of 1/4" NPT and the pole does not have a threaded top plug installed. The adapter is tapped 1/4" NPT and is designed to slip over the top of the pole and is secured by three 1/4"-20NC stainless steel set screws. Please specify color when ordering. If not specified, silver will be supplied. Pole Top Adapters can be mixed to achieve the higher quantity pricing.

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
PTA-238	2 3/8"	1.1	340238	\$50	\$45	340247	\$55	\$50	340256	\$55	\$50	340265	\$55	\$50
PTA-212	2 1/2"	.90	340239	50	45	340248	55	50	340257	55	50	340266	55	50
PTA-3	3"	1.2	340240	67	62	340249	73	67	340258	73	67	340267	73	67
PTA-312	3 1/2"	1.5	340241	67	62	340250	73	67	340259	73	67	340268	73	67
PTA-4	4"	2.1	340242	81	71	340251	89	79	340260	89	79	340269	89	79
PTA-412	4 1/2"	2.3	340243	81	71	340252	89	79	340261	89	79	340270	89	79
PTA-5	5"	2.7	340244	81	71	340253	89	79	340262	89	79	340271	89	79
PTA-512	5 1/2"	3.2	340245	105	95	340254	114	102	340263	114	102	340272	114	102
PTA-6	6"	4.0	340246	105	95	340255	114	102	340264	114	102	340273	114	102

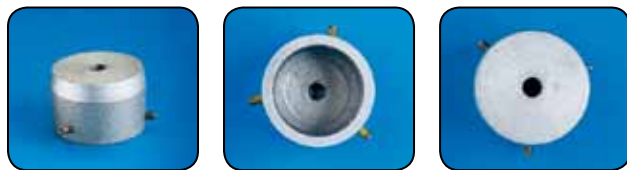

## FLAGPOLE CAPS

Cast aluminum construction designed to slip over the top of the flagpole and be secured with three 1/4"-20NC stainless steel set screws. The top of the cap is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading or no threading. Please specify color when ordering. If not specified, silver will be supplied.

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
FC-20	2"	.60	340274	\$18.50	\$16.50	340276	\$21.50	\$19.50	340278	\$21.50	\$19.50	340280	\$21.50	\$19.50
FC-212	2 1/2"	.60	340275	21.50	19.50	340277	23.50	21.50	340279	23.50	21.50	340281	23.50	21.50



## PULLEY & EYEBOLT ASSEMBLIES

Includes Hex Nut, Washer & Lock Washer



MODEL	ITEM #	OVERALL LENGTH	THREAD LENGTH	BOLT THREADING	BOLT MATERIAL	PULLEY HOUSING MATERIAL	PULLEY MATERIAL	MAX. ROPE DIAMETER	1-5	6+	LBS.
DELUXE	340236	4 1/8"	2 3/8"	5/16"-18NC	STAINLESS STEEL	STAINLESS STEEL	NYLON	5/16"	\$17.50	\$16.50	.02
STANDARD	340237	3 1/8"	1"	#8-32NC	ZINC PLATED STEEL	ZINC	ZINC	3/16"	5.50	5.00	.07



NYLON



ALUMINUM

## ROPE PULLEYS

ITEM #	DIA.	WIDTH	MATERIAL	MAXIMUM AXLE DIA.	MAXIMUM ROPE DIA.	USED WITH OUR TRUCK MODEL NUMBER...	1-5	6+	LBS.
340302	1"	3/8"	NYLON	3/16"	1/4"	ST-1-38, ST-1-12, ST-1-16, ST-1-20	\$2.90	\$2.60	.01
340356	1 1/2"	1/2"	NYLON	1/4"	1/4"	OTH, IH-1-35, OT35	3.70	3.30	.03
340355	1 1/2"	9/16"	NYLON	1/4"	1/4"	ST2, ST3, OT1, OT25, IH-1 INNER PULLEY INSERT	3.70	3.30	.03
340358	1 1/2"	3/4"	NYLON	1/4"	5/16"	RTS-1-125, RTC-1-138, RTC-1-2, RTC-1-238	4.00	3.70	.04
340357	1 15/16"	9/16"	NYLON	1/4"	5/16"	RTS-2-125, RTC-2-138, RTC-2-2, RTC-2-238, RTS-2-150, RTSB	4.00	3.70	.04
340320	2"	1/2"	NYLON	1/4"	5/16"	OT2, OT3, OT325, IH-1-3, IHT-VS	3.70	3.30	.04
340359	2 1/2"	7/8"	ALUMINUM	1/2"	3/8"	HDT-1	21.50	19.50	.40
340305	3 3/4"	3/4"	ALUMINUM	1/2"	3/8"	HDT-2	21.50	19.50	.45

\*340356 is also used with our Vertical Mount Pulley Assemblies. Please note that the diameter of all of our nylon pulleys can vary plus or minus 1/16".



## VERTICAL MOUNT PULLEY ASSEMBLIES

Cast aluminum construction with a 1-1/2" outside diameter cast nylon pulley on a 1/4" stainless steel axle. Attaches with two 1/4"-20NC stainless steel flat head screws or two stainless steel straps (screws and/or straps not included). Maximum halyard diameter is 5/16". Not supplied as standard with holes drilled for mounting. Add \$2.00 for drilling.



## THREADED TOP PLUGS

Screws into top of pole with 1/4" NPT threading and allows for insertion of ornament with either a 1/2"-13NC or 5/8"-11NC spindle threading.

ITEM #	COLOR	1-5	6+	LBS.
340298	SILVER	\$22.50	\$20.50	.60
340299	BRONZE #313	26.00	23.50	.60
340300	BLACK	26.00	23.50	.60
340301	WHITE	26.00	23.50	.60

ITEM #	FOR ORNAMENT SPINDLE SIZE	1-5	6+	LBS.
340306	1/2"-13NC	\$27.00	\$24.50	.25
340307	5/8"-11NC	29.00	26.00	.25

All bronze colored accessories on pages 162 through 186 are supplied in a dark bronze #313 shade. If medium bronze #312, light bronze #311 or a custom color is desired, please call for pricing.